



HEADRUSH TM
MC



Bluetooth® 3.0 Headphones

OWNER'S MANUAL

8018807/8820



CONTENTS

FUNCTIONS	2
BEFORE USING	3
1. Overview	3
2. Charging the Headset	3
HOW TO USE	4
1. Switching On/Off Headset	4
2. Pairing the Headset to Bluetooth Devices	4
3. Re-connecting to a Bluetooth Device	5
4. Making Calls with the Headset	5
5. Playing Music	5
6. LED	6
7. Low Power Indication Tone	6
CARE AND MAINTENANCE	6
SPECIFICATIONS	7
FCC and WARRANTY	7

WHAT'S IN THE BOX :

Headphones
Micro USB Cable
Carrying Pouch
Owner's Manual



The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc.
All other trademarks and trade names are those of their respective owners.



Thank you for purchasing your Headrush Headphones. In order to maximize your listening experience, please read the instructions below carefully.

This Bluetooth stereo headset supports the following Bluetooth profiles:

HSP — Headset Profile

HFP — Hands-free Profile

A2DP— Advanced Audio Distribution Profile

AVRCP— Audio/Video Remote Control Profile

You can enjoy wireless music and hands-free talking by using your HEADRUSH Bluetooth Headset.

FUNCTIONS

1. Pairing with any mobile phone with built-in Bluetooth devices (e.g. iPhone, HTC, Samsung) and Tablet (such as iPad).
 - Answer, end and reject call from the headset
 - Redial last number.
 - Voice dial.
 - Listen to music wirelessly
 - Fully remote control buttons on the headset for pause / play / last track / next track / re-dial / voice call.
2. Automatically switch between your phone and music; you will not miss any incoming calls while listening to music.
3. Automatically connect with the last paired device when the headset is turned on.
4. The battery indicator feature is available on iOS5 and 6 on iPhone, iPad. It will show the battery status for the headset without installing any Apps.
5. **Multilink technology** allows you to connect to two devices at the same time. All you need to do is simply repeat the pairing process for the second device and manually reconnect from the first device.
6. Voice prompt now comes with five status alerts in English. Power on, power off, pairing, pairing completed, incoming call. The voice notice comes directly through the headset and tells what the current status is about.

Note: Even though the paired device and headset support the same Bluetooth profiles, the functions may be different due to the specification differences of the paired devices.



BEFORE USING

1. OVERVIEW

1. The Headset expands for a comfortable fit.
2. > **Key** : next track
3. < **Key** : last track
4. LED Indicator for different status
5. **Multifunction button (MFB)**: Switch on/off the headset, answer, stop call, voice dial, redial last number, pause and play
6. + **Key**: volume up
7. - **Key**: volume down


2. CHARGING THE HEADSET

- **First time charging:**
Please be sure the battery has been charged fully before use.
- When you hear the warning indicator tones of “DU DU DU” and, at the same time, the red light blinks twice.
Please charge the battery fully.

A. Charging the battery with Micro USB cable

- **Step 1:**
Insert the USB charging cable into the USB port which supports 5V power (such as AC/DC USB adapter or PC USB port).
- **Step 2:**
Connect the charging cable to the charging port of the headset.
 - When the red light is on, the headset is charging.
 - When the blue light is on, the headset is fully charged.
 - It takes approximately 3 hours to fully charge the headset.

Note: when you plug in the charger cable, please turn off the headphones.

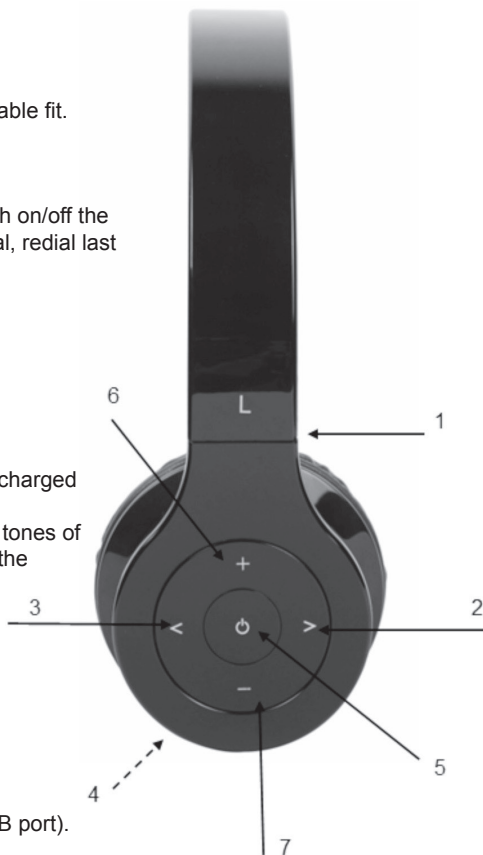



HOW TO USE

1. SWITCHING ON / OFF HEADSET

Function	Operation	LED Indicator	Voice Prompt
Switch on	Press the MFB button for 3 seconds, and release it till the blue LED is on	Blue LED blinks 3 times.	Power On
Switch off	Press the MFB button for 5 seconds, and release it till the red LED is on	Red LED blinks 3 times	Power Off

2. PAIRING THE HEADSET WITH BLUETOOTH DEVICES

A. How to enter pairing mode

Function	Operation	LED Indicator	Voice Prompt
Enter pairing mode	Make sure the headset is off. Press and hold MFB button for 6 seconds, and release it until the red and blue LEDs blink alternately	Red and blue LEDs blink alternately.	Pairing

B. Pairing the headset with a Bluetooth mobile phone

Please make sure your mobile phone has a Bluetooth function that can be used.

Note: Specific pairing procedures may vary with different mobile devices. Please refer to your mobile device manual for further information. Steps as follows:

- Please keep the headset and mobile phone in the range of 1 meter when pairing.
- Make the headset enter into pairing mode (LED is blinking red and blue)
- Start the Bluetooth function of the mobile device and search for new Bluetooth devices. Select “**8018807-20**” in the Bluetooth device list.
- When you are prompted, enter password or PIN No: “**0000**”, and press the “Yes” key or “confirmed”. (depending on the Bluetooth device’ settings)
- After successful pairing, select “**8018807-20**” in the Bluetooth device list, and press “connect”.
- After pairing is successfully completed, the blue LED of the headset will keep blinking.

Notes:

- If the pairing is not successful, switch off the headset, and then pair again.
- After pairing is successful, paired devices will remember each other. Unless pairing information is deleted because of new pairing, it will not be necessary to pair again the next time you use the device. If you want to pair the headset with other devices, please pair it with the new device according to steps 1~6 mentioned above.
- Multilink technology allows simultaneous connection to two different devices. Simply repeat the pairing process on both devices.
- If a driver is not found, a Windows update may be necessary. Please visit the Microsoft website to obtain your update.

3. RE-CONNECTING TO A BLUETOOTH DEVICE



- **Automatic connecting**

Every time the headset is switched on, it will connect to the last connected device automatically. The source Bluetooth device must be turned on.

- **Manual connecting to last connected HFP device**

When the headset is in standby mode and doesn't connect to any HFP devices, quickly press the MFB button once. It will connect to last connected source device automatically.

Notes:

- Before connecting to a Bluetooth device, please turn on the Bluetooth device's function.
- On some Bluetooth phones, you have to allow automatic connecting in the mobile phone's settings. Please refer to your mobile phone's manual for further information.

4. MAKING CALLS WITH THE HEADSET

Function	Status of Headset	Operation
Voice dial	Standby mode	Press and hold MFB button for 1 second, release it till hearing indication sound ,then speak the number you want to call.
Redial last number	Standby mode	Quickly press the MFB button twice
Volume up	Conversation mode	Quickly press the + key
Volume down	Conversation mode	Quickly press the - key
Answer calling	Ringing	Quickly press the MFB
Reject calling	Ringing	Press and hold MFB button for 1 second, and release until you hear indication sound

- Not all the mobile phones support all the functions listed above. Please refer to the instructions of your mobile phone.
- Some functions and indicator tones may vary with different mobile phones.
- When the volume is adjusted to max or min, you will hear an indicator tone.
- For some mobile phones, when you press the key to accept a call, the conversation will be sent to the mobile phone. You can switch the call to the headset by using the conversation switch button or answer the call on your mobile phone. Please refer to the instructions of your mobile phone for further information.

5. PLAYING MUSIC

When the headset connects with the mobile phone or Bluetooth transmitter, you can enjoy music wirelessly through the headset.

Function	Status of Headset	Operation
Pause	Playing music	Quickly press the MFB
Play	Pausing	Quickly press the MFB
Next track	Playing music	Quickly press the > key
Last track	Playing music	Quickly press the < key
Volume up	Playing music	Quickly press the + key
Volume down	Playing music	Quickly press the - key



Notes:

- On some mobile phones, while playing music, the music will transmit to the speaker of the mobile phone. Select **“transmit the sound through Bluetooth”** in the “settings” of music play interface, and then choose **“8018807-20”** in the device list, the music will be transmitted to the headset. Please refer to the instructions of your mobile phone for further information.
- When the volume of headset is adjusted to max. or min, you will hear a **“DU DU DU”** indication tone.
- To remotely control the function of last track/next track/pause, your mobile phone or Bluetooth transmitter must support AVRCP. Please refer to the instructions of your mobile phone or Bluetooth transmitter for further information.

6. LED

1. Battery Charging mode

Function	Status of Headset
Red LED is on	Charging
Blue LED is on	Charging complete

2. Operation Mode

LED Indicator	Status of Headset
Red and blue LEDs blink alternately	Pairing mode
Blue LED quickly blinks twice every 1 seconds.	Not connected to a device
Blue and Red LED quickly blinks three times every 2 seconds	Set up HFP and A2DP connection
Red LED blinks twice every 20 seconds	Low power

7. LOW POWER INDICATION TONE

“DU” tones every 20 seconds

CARE AND MAINTENANCE

Please read the following suggestions carefully.

- Keep dry and away from damp places, to prevent damage to the interior circuits of the product.
- Keep away from sunlight or hot areas. High temperature will shorten the life of this electronic device, destroy the battery, or distort certain plastic parts.
- Exposure to cold may damage the internal circuit board.
- Do not drop or bang on hard surfaces. It may damage interior circuits.
- Do not use chemicals or detergents to clean the product.
- Do not scrape the surface with sharp objects.
- Consult a qualified professional in the event a repair is required.



SPECIFICATIONS

Driver Size: 40 mm
Impedance: 32 Ω
Sensitivity: 84dB
Frequency: 20 ~ 20KHz
Bluetooth Specification:
 ISSC V3.0+EDR,
 Support: HSP,HFP,A2DP,AVRCP
Operating Range: 10 m
Working Time: 10 hours
Standby Time: 250 hours
Battery: 320 mAH Li battery
Charging Time: Approximately 3 hours,
 Charge via Micro USB
 cable
Input: DC 5V/160mA
Product Size: 170*175*70MM

FCC

The FCC Wants You to Know

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for additional suggestions.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Where shielded interface cables have been provided with the product or specified additional components or accessories elsewhere defined to be used with the installation of the product, they must be used in order to ensure compliance with FCC regulation.

Industry Canada Notice

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of Industry Canada.

IC Number: 255A-80188

THE SOURCE - WARRANTY



The Source warrants that this product will be free from defects in materials and workmanship for a period of one (1) year from the date of purchase. Within this period, simply take the product and your proof of purchase to any The Source store or participating dealer and the product will be replaced (where available) without charge. Any product which has been subject to misuse or accidental damage is excluded from this warranty.

This warranty is only applicable to a product purchased through The Source company-owned stores or participating dealers in Canada where the warranty is included with the product. While this warranty does not confer any legal rights other than those set out above, you may have additional statutory rights which will vary under the laws of the various countries, states, provinces and other governmental entities in which The Source operates. This warranty is subject to all statutory rights you may have in Canada.



Imported by:
 The Source,
 Barrie, Ontario, Canada, L4M 4W5

Manufactured in China

For product support please visit
www.thesource.ca



Please Recycle